

SCOPE OF WORK

Contractor shall locate centerline and apply double yellow centerline marking on campground roads as indicated on plan. Length of project estimated to be 12,100 ft.


MATERIAL

Paint used shall be a commercial grade high quality latex designed for pavement marking applications. Sherwin Williams #TM2508 yellow, Ennis Paint #981602 KSY-21-M-1 Yellow, or approved equal shall be considered and must be compatible with Kansas Department of Transportation Standard Specifications, 2007 edition.

Glass beads furnished for paint shall be regular beads which are specifically manufactured to be compatible with paint used, and complying with AASHTO M247, Type 1. Beads shall be coated with moisture resistant coating and an adhesion promoting coating which is compatible with the paint used.

APPLICATION

Paint shall be applied at a rate to provide an approximate 18mil wet film thickness and glass beads at a rate of 10 pounds per gallon of paint. Stripes shall be 4" in width.

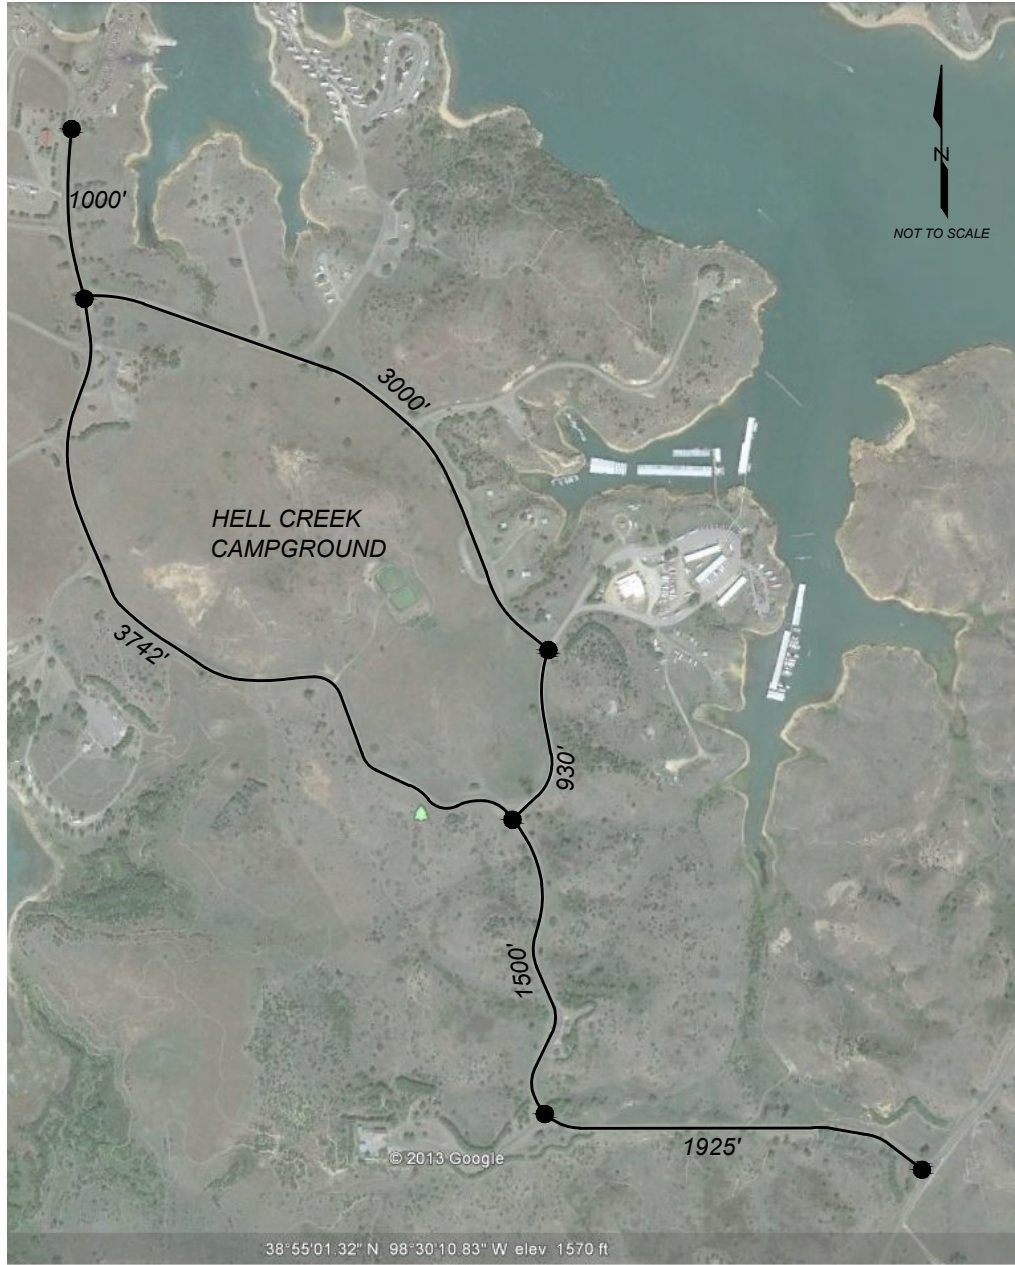

WILSON STATE PARK
OVERLAY STRIPING

SHEET TITLE

Project No.